

ASSEMBLY INSTRUCTIONS


Aimee Medium Chandelier

Item# SK5550

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.
IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.
ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING.
RETAIN ALL PACKING MATERIAL UNTILL INSPECTION AND INSTALLATION ARE FINAL.

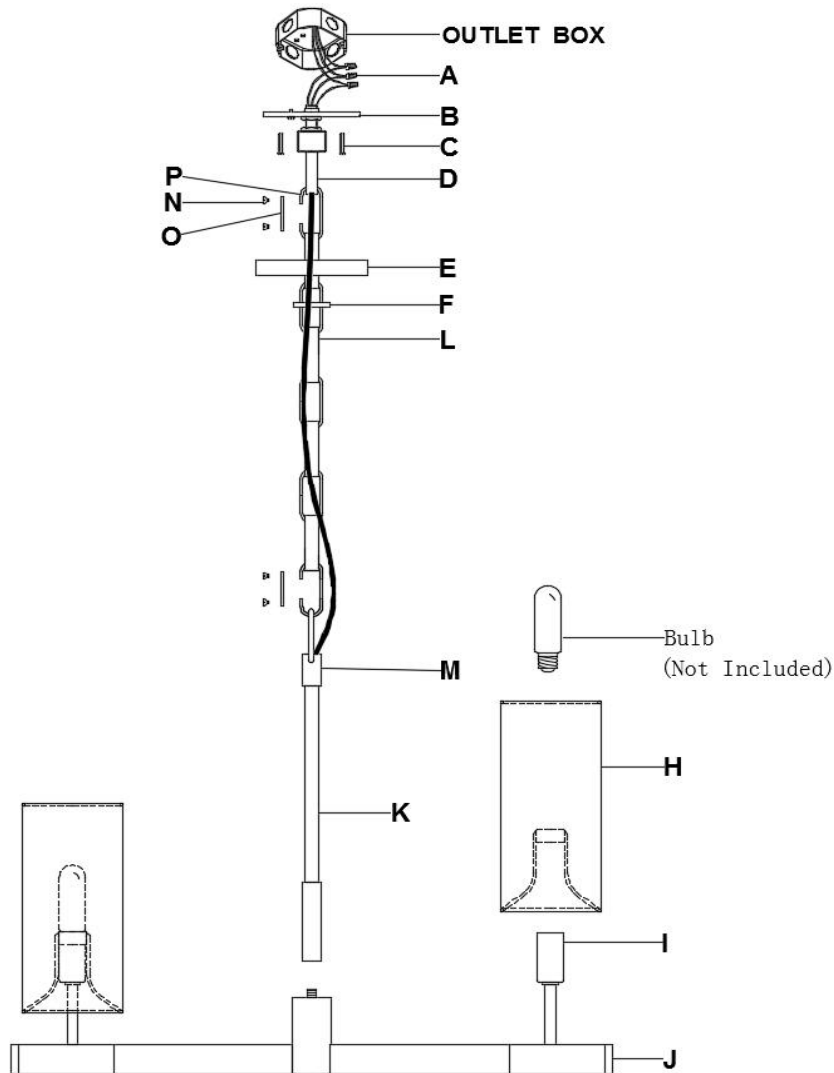

1. Carefully remove all parts from the box.
 2. Remove the mounting plate (B) from the canopy (E) by loosening collar ring(F).
 3. Install the mounting plate (B) with ceiling loop(D) to the ceiling and secure with screws(C).
 4. Feed wire from fixture(J) through the rod (K), thread the rod (K) to the fixture (J).
 5. Unscrew the quick link(P) by loosening the metal piece(O) and screw(N) on one end of the chain(L).
 6. Hand up the ring(M) on the rod(K) to the quick link(P),then close the quick link(P) by secure with metal piece(O) and screw(N).
 7. Slip the collar ring(F) and canopy(E) through down to chain(L).
 8. Unscrew the quick link(P) by loosening the metal piece(O) and screw(N) on another end of the chain(L).
 9. Hand up the fixture to the ceiling loop(D),then close the quick link(P) by secure with metal piece(O) and screw(N).
 10. Unwrap the wiring from the rod (K),twist power supply and ground wire together. And pass through center hole of collar ring(F), canopy(E) and mounting plate (B).
 11. Measure the wires and cut it to desired length. Be sure to be enough for connection to outlet supply wire.
 12. Connect the ground wire from the fixture to the ground wire from the outlet box(usually green or copper in color) using wire nut(A)..
- IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
13. Connect the fixture Neutral wire(White) from the fixture to the neutral wire(White) from the outlet box using wire nut(A).
 14. Connect the fixture Hot wire(Black) from the fixture to the Hot wire(Black) from the outlet box using wire nut(A).
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
15. Tuck the wire connections neatly into ceiling outlet box.
 16. Slip canopy(E) flush to ceiling and secure with collar ring (F).
 17. Install the shade (H) to the socket (I).
 18. Insert the bulb(not included) into the lamp socket (I).
 19. Installation is completed, turn on power at fuse or circuit breaker.

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

