# CH302008-UNV

## Chandelier

# **TECHNICAL SUPPORT**

1.855.855.8926 technical support@aloralighting.com

1a

# WARNINGS AND CAUTIONS

- Make sure POWER is COMPLETELY OFF at the fuse box
- · Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all times during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

### Please Note:

- This Alora LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- For dimming, an ELV (Electronic Low Voltage) or TRIAC type of dimmer is required
- 120-277V input

# NOTICE

- · The important safeguards and instructions outlined in this sheet cannot cover all possible conditions and situations that may occur. It must be understood that caution and certain care factors must be followed. These instructions are provided for your safety and we highly recommend that a licensed, trained electrician install this unit.
- · This fixture is designed to be mounted on a correctly installed standard round or octagon box OR through a wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The crossbar and hardware supplied should be used, directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.

# ASSEMBLY INSTRUCTIONS


## Step 1

Remove the mounting plate (1c) from within the canopy (2a) by loosening the two mounting screws provided (2b). Attach the mounting plate (1c) to the junction box (1a) using two junction box screws (not provided) (1f).

# Step 2

Select the desired length you wish the chandelier to hang. Loosen the set screw on the cord adjusting mechanism (2c) to release the fixture cord and push or pull the cord to reach desired length. To secure the cord, re-tighten the set screw on the cord adjusting mechanism (2c). Connect the fixture wires to the junction box wires using the marrettes provided (1b). (white to white "N", black to black "L", green to green "G"). Now secure the canopy (2a) to the mounting plate (1c) using the two mounting screws provided (2b).

You are now ready to enjoy your fixture.

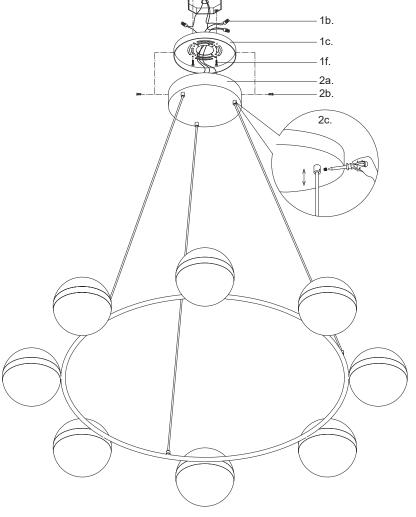



P: 1.855.855.8926

CANADA: 19054 28th Avenue Surrey - BC V3Z 6M3 USA: 3035 E. Lone Mountain Rd - Las Vegas, NV, 89081 www.aloralighting.com