

ASSEMBLY INSTRUCTIONS

Strada Large Round Pendant

Item # KW 5072


WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.



ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.



To assemble safety cables:

1. Join fixture safety cables with safety cable from ceiling.
2. Wrap both safety cable around the cable lock nut.
3. Insert screws into both holes on cable lock nut, secure screws with screwdriver.
4. Push the cable lock nut into outlet box.

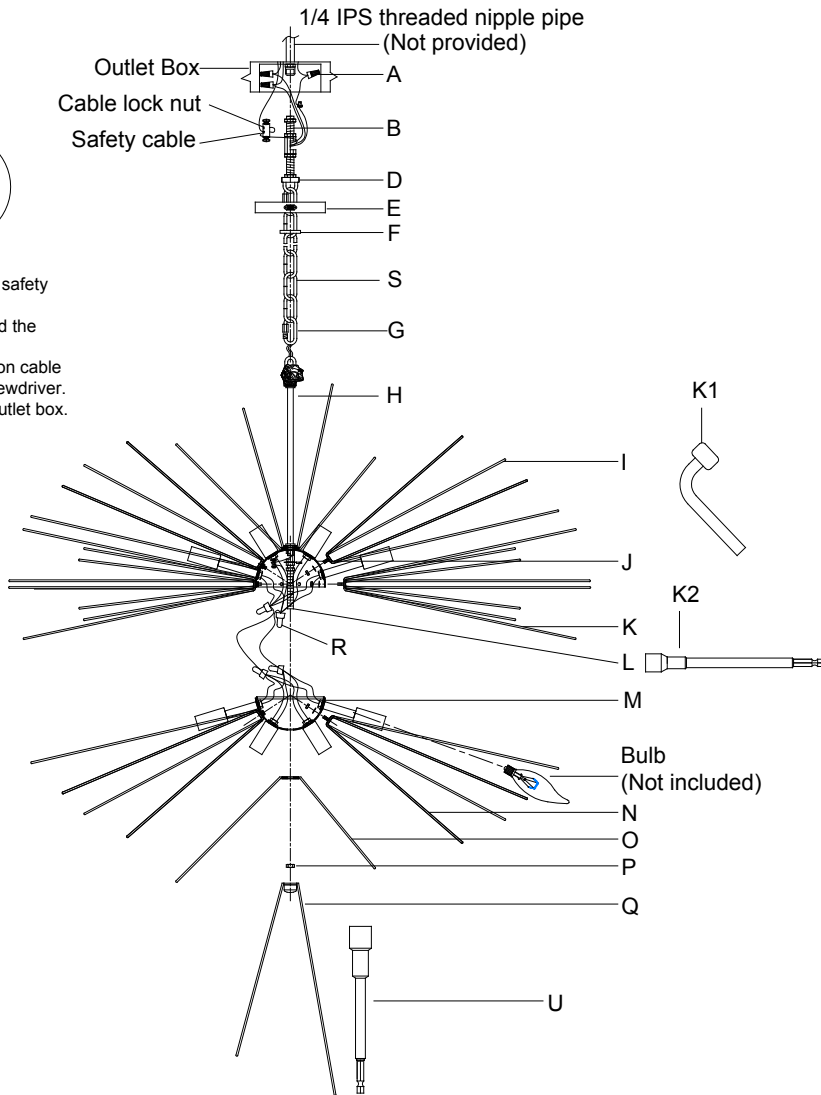

1. Carefully remove all parts from the box.
2. A 1/4" threaded nipple must be installed in your outlet box. Then install the threaded nipple (B) into the outlet box.
3. Attach branch (I) to top half ball (J), and secure with hex nut by wrench (K2) provided.
4. Attach all branches (K) to top half ball (J), and then secure with hex nut by wrench (K1) provided.
IT IS IMPORTANT TO LET ALL BRANCHES (K) ASSEMBLED AND EVEN DISTRIBUTION, THEN TIGHTEN IT BY WRENCH.
5. Attach the thread nipple (L) to the hickey from inside of top half ball.
6. Attach branch (I) to bottom half ball (M), and secure with hex nut by wrench provided.
7. Connect the Hot wire (black) from bottom half ball (M) to the Hot wire (black) from the top half ball (J) with nipple (R).
8. Connect the Neutral wire (white) from bottom half ball (M) to the Neutral wire (white) from the top half ball (J) with (R).
9. Attach bottom half ball (M) with branch (O) to the top half ball (J) and let the threaded nipple (L) go through the center hole of bottom half ball (M), then tighten with hex nut (P) by wrench (U) provided
10. Thread the finial (Q) to the bottom of threaded nipple (L).
11. Insert bulbs (not included) into the sockets.
12. Unscrew the threaded collar on the chain end link (G) and attach it to the fixture top center ring. Close the threaded collar to secure the fixture.
13. Let canopy (E) and lock collar (F) go through the chain (S).
14. With the fixture dimension as a guide, shorten the chain (S) as needed using a pair of chain pliers.
15. Unscrew the threaded collar on the other chain end link, raise the fixture then attach chain end link to the ceiling loop (D). Close the threaded collar to secure.



ASSEMBLY INSTRUCTIONS

Strada Large Round Pendant Item # KW 5072

For a more personalized style you are able to gently bend spines in any direction.
NOTICE: BENDING SPINES MULTIPLE TIMES CAN CAUSE THEM TO BREAK

