
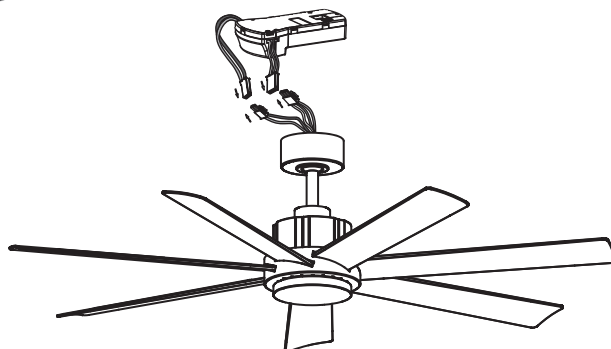


**PENDRY™ 56**

**FPD6865\*\***  
**56" Ceiling Fan**

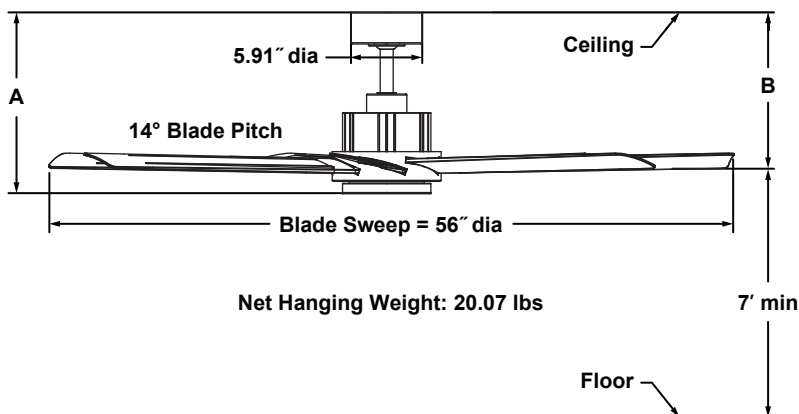

featuring KwikWire easy connection

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

DC126 x 12 sensorless DC motor is designed for optimal performance with this fan.

**BLADE SET:**

A set of seven 25" composite blades is included.

**CONTROL OPTIONS:**

A WiFi receiver and TR305 hand-held remote control are included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW306 wall control is available — sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

LK6865 - One 24-watt CCT LED (Warm/Natural/Cool).

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

**LOCATION USE:**

BLBN and BSMW Fan are rated for damp locations.  
 BLW and MWW Fan are rated for wet locations.  
 This fan is for room over 400 sq ft.

	A	B
Fan w/6" downrod	14.57"	12.91"
Fan w/12" downrod	20.57"	18.91"
Fan w/18" downrod	26.57"	24.91"
Fan w/24" downrod	32.57"	30.91"
Fan w/36" downrod	44.57"	42.91"
Fan w/48" downrod	56.57"	54.91"
Fan w/60" downrod	68.57"	66.91"
Fan w/72" downrod	80.57"	78.91"

Available Finishes	
BLBN	Black and Brushed Nickel Flywheel with Black Blades (Damp)
BSMW	Brushed Satin Brass with Matte White Blades (Damp)
BLW	Black with Black Blades (Wet)
MWW	Matte White with Matte White Blades (Wet)

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 <sup>th</sup> )	137	6847	211	0.43	32
Med (9 <sup>th</sup> )	88	4143	451	0.13	9
Low (1 <sup>th</sup> )	29	1367	600	0.04	2

Energy Guide FTC			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
22	4278	6	196